



the future is safer with altro


altro

Altro Nuvola Cirrus™

Rubber Flooring / Suelos de caucho / Kautschukbodenbeläge



Lace ANC2002
AWR002 / LRV42




Moat ANC2004
AWR004 / LRV22



Smoulder ANC2005
AWR005 / LRV14



Panther ANC2006
AWR006 / LRV6



Powder ANC2007
AWR007 / LRV23




Indigo ANC2008
AWR008 / LRV10



Ribbon ANC2014
AWR014 / LRV9




Saffron ANC2015
AWR015 / LRV44



Wicker ANC2011
AWR011 / LRV53




Mouse ANC2001
AWR001 / LRV26



Spice ANC2010
AWR010 / LRV14



Ruby ANC2009
AWR009 / LRV10

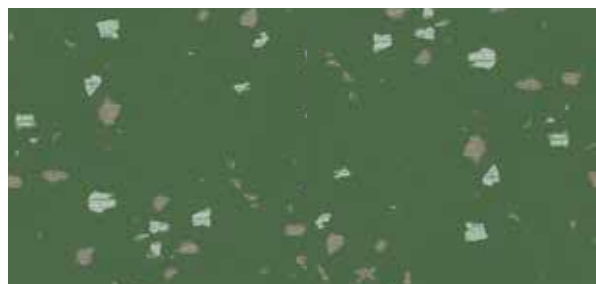


















Ivy ANC2012
AWR012 / LRV16

Light Reflectance Values measured in accordance with BS8493:2008. Exact material match with samples cannot be guaranteed.
No podemos garantizar que el material del suelo de seguridad coincida exactamente con el de las muestras.
Eine exakte Übereinstimmung des materials mit mustern kann nicht garantiert werden.

Codes: **WR** = weld rod, **LRV** = light reflectance value.
Códigos: **WR** = Cordon de soldadura, **LRV** = Valor de reflectancia de la Luz.
Abkürzungen: **WR** = Schweißschnüre, **LRV** = Lichtreflexionswert



A+ BRE generic green fluide
rating for rubber flooring,
full details available at
www.thegreenguide.org.uk

Flooring type Tipo de pavimento Belagsart		EN 1817	Rubber flooring Suelo de caucho Kautschukbodenbeläge
Classification for use Areas de uso Einsatzbereiche		EN 685	23, 34 and 42 23, 34 y 42 23, 34 und 42
Slip resistance Resistencia al deslizamiento Rutsicherheit		EN 13893 DIN 51130	DS R9
Thickness Espesor total Gesamtdicke		EN 428	2 mm
Wear layer Capa de uso Nutzschicht		EN 429	2 mm
Weight Peso Flächengewicht		EN 430	3.3 kg/m ²
Roll dimensions Dimensiones del rollo Rollenabmessungen		EN 426	1.90 x 14m = 26.6m ²
Light fastness Resistencia a la luz Lichtechtheit		EN 20105-B02	≥6
Sound insulation Aislamiento acústico Trittschall		EN ISO 10140-3	approx 6 dB
Wear resistance Abrasión Verschleißverhalten		ISO 4649	≤ 250mm ³
Indentation Punzonamiento Resteindruck		EN 433	≤ 0.15mm
Fire performance Reacción al fuego Brandverhalten		EN 13501-1	Class Bfl s1 Clase Bfl s1 Klasse Bfl-s1
Chemical resistance Resistencia a los productos químicos Chemikalieneinwirkung		EN 423	Good Buena Beständig
Castor chair abrasion Huellas de ruedas de sillas Stuhlrollenbeanspruchung		EN 425	Pass Conforme Geeignet
Under floor heating Calefacción por el suelo Fußbodenheizung		DIN 52612	Suitable Apto Geeignet
Electrical behaviours Características eléctricas Elektrisches Verhalten		EN 1815	≤ 2kV Antistatic ≤ 2kV Antiestáticas ≤ 2kV antistatisch
Flexibility Flexibilidad Flexibilität		EN 435	Pass Conforme Bestanden

Installation and Maintenance

All installations in accordance with code of practice BS 8203:2001, and Altro rubber installation instructions. Subfloor as code of practice, with effective DPM where necessary. Adhesives as recommended in Altro rubber flooring installation instructions, the Altro price list or visit www.altro.com.

N.B. Failure to install and maintain Altro flooring in accordance with Altro's instructions can affect the performance of the product.

Floors should be protected from other trades and thoroughly cleaned before handover. All information is correct at the time of print and is subject to change without prior notice. Visit us at www.altro.com for more information and updates.



Gulvbranchen

Garanti for gode gulve



Altro Limited a company certified by SGS to ISO 9001 and ISO 14001.

